



# 40PA/42BYG PLANET GEAR STEPPER MOTOR

- Housing Material: Metal
- Backlash at No-Load:  $\leq 1^\circ$
- Bearing at Output: Ball or Sleeve
- Permissible Overhung Load:  $\leq 2.5\text{kg}$
- Permissible Thrust Load:  $\leq 0.5\text{kg}$
- Max. Radial Play:  $\leq 0.05\text{mm}$
- Max. Thrust Play:  $\leq 0.3\text{mm}$



## ● Mechanical Dimensions

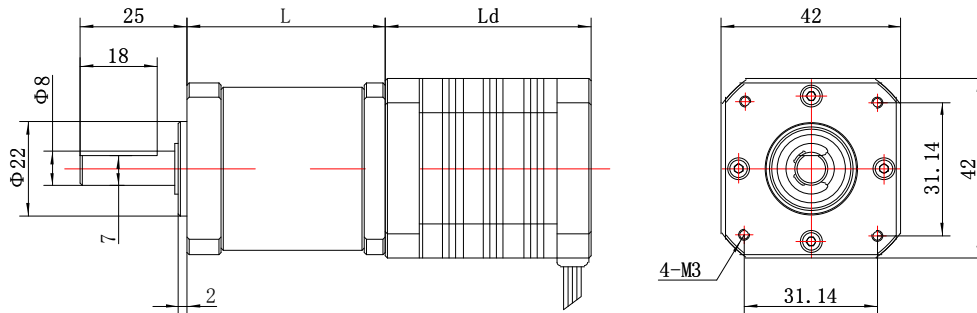

## ● Gear Box Data

Reduction Ratio	X:1	3	4	5	9	15	20	25	36	48	60	80	100	125
Number of gear trains	#	1	1	1	2	2	2	2	3	3	3	3	3	3
Max Permissible Torque	kg.cm	20	20	20	30	30	30	30	40	40	40	40	40	40
Moment Permissible Torque	kg.cm	40	40	40	50	50	50	50	60	60	60	60	60	60
Gear Box Length	mm	31.5	31.5	31.5	40.5	40.5	40.5	40.5	49.5	49.5	49.5	49.5	49.5	49.5

## ● Motor Specifications

Model	Step Angle	Length (Ld)	Phase Voltage	Phase Current	Phase Resistance	Phase Inductance	Holding Torque	Lead Wire
	°	mm	V	A	$\Omega$	mH	g.cm	#
42BYGH25(M)-091-4A/B	0.9/1.8	25	3	0.91	3.3	8	1600	4
42BYGH34(M)-040-4A/B	0.9/1.8	34	12	0.40	30	37	2200	4
42BYGH40(M)-040-6A/B	0.9/1.8	40	12	0.40	30	21	2570	6
42BYGH40(M)-160-4A/B	0.9/1.8	40	2.78	1.60	1.73	3.2	3600	4
42BYGH48(M)-040-6A/B	0.9/1.8	48	12	0.40	30	25	3200	6
42BYGH48(M)-120-4A/B	0.9/1.8	48	3.6	1.20	3	5	4500	4

Replace □ with A = single shaft; replace □ with B = double shaft

### Product Code:

<b>40</b>	<b>PA</b>	<b>25</b>	<b>G</b>	/	<b>42</b>	<b>BYG</b>	<b>34</b>	-	<b>040</b>	-	<b>4</b>	<b>A</b>
Size	Type	Ratio	Bearing		Size	Type	Length		Current		# leads	Shaft
40mm	Planetary	25:1	Ball		42mm	Hybrid	34mm		0.40A		4	single