


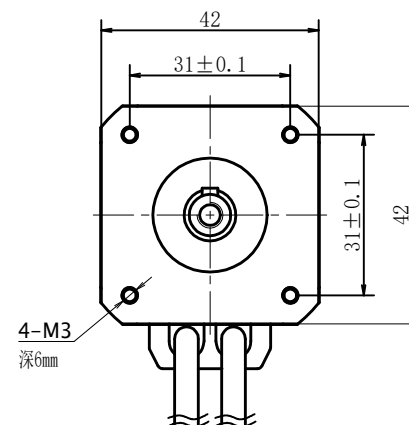

11 Encoder Cable:2500 PPR
Cable:K/VVO 26*7P
Cable Length:300±20mm
(17Bit Absolute Magneti Encoder as Option)

Encoder Lead Definition		
No	Signal	Color
1	0V	Black
2	+5V	Red
3	W	Orange
4	V	Gray
5	U	Brown
6	Z+	Yellow

Motor Definition			7	B+	Green
No	Signal	Color	8	A+	White
1	U	Yellow	9		
2	V	Green	10		
3	W	Blue	11		
			12		
			13	Z-	Yellow/Black
			14	B-	Green/Black
			15	A-	White/Black

CONFIRMED&ACCEPTED BY CUSTOMER (客户确认&接受)						型号/MODEL	
COMPANY CHOP&SIGNATURE (盖章&签名)						17NYTT486030-24D8PJ3EC	
一般公差 TOLERANCE ±0.5/±3°		版本 REV.	日期 DATE	变 更 内 容 REVISION RECORD		设计 BY	备 注 NOTE
设 计/DESIGNED	Lu 2024.01.15	比 例 SCALE	1:1	BLDC SERVO MOTOR		第一角画法 FIRST ANGLE METHOD	
审 核/CHECKED		单 位 UNIT	mm	Source Engineering Inc			
批 准/APPROVE						SHEET 页 1 / 1	