




## YJF82 Shaded Pole Motors

● **General Specifications:**

Voltage	110V/60Hz, 220V/50Hz
Duty	Continuous
Insulation	Class E
Direction	CW/CCW
Seal Options	ABS or Expoksi
Shaft Options	Flat, Thread
Lead Options	Terminal, Plug
Bearing Options	Sleeve, Ball
End Bell Options	Aluminum, Nylon

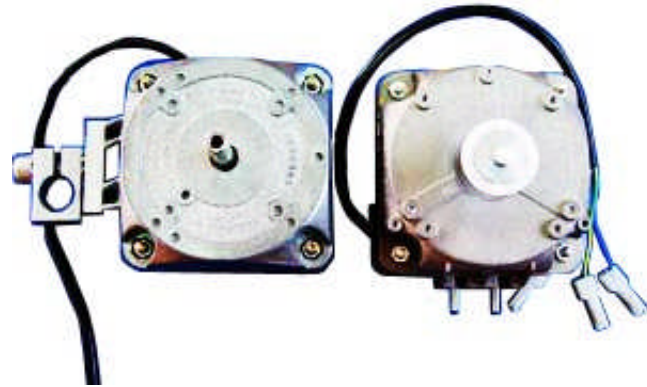

● **Motor Specifications ( 马达特性 )**

$$Y(\text{oz-in}) = 0.141612 * X(\text{mNm})$$

MODEL 型号	Voltage	Frequency	No Load		Rated				Protection	Dimensions			
			Speed	Current	Speed	Current	Torque			Output	A	B	C
	VAC	Hz	RPM	A	RPM	A	g*cm	mN*m		W	mm	mm	mm
YJF82/13-4	220	50	1600	0.22	1300	0.26	377.3	37.0	5.0	ZP	81	13	51
YJF82/20-4			1600	0.26	1300	0.3	744.4	73.0	9.9	ZP	88	20	51
YJF82/25-4			1600	0.4	1350	0.45	1152	113	16.0	ZP	97	25	55
YJF82/32-4			1600	0.48	1350	0.53	1443	142	20.0		118	32	69

● **Motor Dimensions ( 外形尺寸图 )**

